

## NEVE RECT 60X120

| REFERENCE      | SIZE (cm)  | THICKNESS (mm) | GROUP   |
|----------------|------------|----------------|---------|
| <b>A042019</b> | 60X120 REV | 7,10           | REVESTI |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                    |
| Flexion resistance        | EN ISO 10545-04 | => 15 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | 0.00                    |
| Cracking resistance       | EN ISO 10545-11 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GB  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB  |
| Stains resistance                                      | EN ISO 10545-14 | 3   |

## MANDORLA RECT 60X120

| REFERENCE      | SIZE (cm)  | THICKNESS (mm) | GROUP   |
|----------------|------------|----------------|---------|
| <b>A042434</b> | 60X120 REV | 7,20           | REVESTI |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                    |
| Flexion resistance        | EN ISO 10545-04 | => 15 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | 0.00                    |
| Cracking resistance       | EN ISO 10545-11 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GB  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB  |
| Stains resistance                                      | EN ISO 10545-14 | 3   |



## BELLAGIO BIANCO RECT 60X120

| REFERENCE      | SIZE (cm)  | THICKNESS (mm) | GROUP   |
|----------------|------------|----------------|---------|
| <b>A041896</b> | 60X120 REV | 8,30           | REVESTI |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                    |
| Flexion resistance        | EN ISO 10545-04 | => 15 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | 0.00                    |
| Cracking resistance       | EN ISO 10545-11 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GB  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB  |
| Stains resistance                                      | EN ISO 10545-14 | 3   |

## BELLAGIO NUVOLE RECT 60X120

| REFERENCE      | SIZE (cm)  | THICKNESS (mm) | GROUP   |
|----------------|------------|----------------|---------|
| <b>A041897</b> | 60X120 REV | 8,20           | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                    |
| Flexion resistance        | EN ISO 10545-04 | => 15 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | 0.00                    |
| Cracking resistance       | EN ISO 10545-11 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GB  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB  |
| Stains resistance                                      | EN ISO 10545-14 | 3   |

## LARIO BIANCO RECT 60X120

| REFERENCE      | SIZE (cm)  | THICKNESS (mm) | GROUP   |
|----------------|------------|----------------|---------|
| <b>A041898</b> | 60X120 REV | 8,20           | REVESTI |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                    |
| Flexion resistance        | EN ISO 10545-04 | => 15 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | 0.00                    |
| Cracking resistance       | EN ISO 10545-11 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GB  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB  |
| Stains resistance                                      | EN ISO 10545-14 | 3   |

## LECCO BIANCO RECT 60X120

| REFERENCE      | SIZE (cm)  | THICKNESS (mm) | GROUP   |
|----------------|------------|----------------|---------|
| <b>A041899</b> | 60X120 REV | 7,60           | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                    |
| Flexion resistance        | EN ISO 10545-04 | => 15 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | 0.00                    |
| Cracking resistance       | EN ISO 10545-11 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GB  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB  |
| Stains resistance                                      | EN ISO 10545-14 | 3   |



## CARENO SERA RECT 60X120

| REFERENCE      | SIZE (cm)  | THICKNESS (mm) | GROUP   |
|----------------|------------|----------------|---------|
| <b>A041907</b> | 60X120 REV | 7,40           | REVESTI |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                    |
| Flexion resistance        | EN ISO 10545-04 | => 15 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | 0.00                    |
| Cracking resistance       | EN ISO 10545-11 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GB  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB  |
| Stains resistance                                      | EN ISO 10545-14 | 3   |



## SORICO BIANCO RECT 60X120

| REFERENCE      | SIZE (cm)  | THICKNESS (mm) | GROUP   |
|----------------|------------|----------------|---------|
| <b>A041938</b> | 60X120 REV | 8,40           | REVESTI |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                    |
| Flexion resistance        | EN ISO 10545-04 | => 15 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | 0.00                    |
| Cracking resistance       | EN ISO 10545-11 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GB  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB  |
| Stains resistance                                      | EN ISO 10545-14 | 3   |



## GERA AVORIO RECT 60X120

| REFERENCE      | SIZE (cm)  | THICKNESS (mm) | GROUP   |
|----------------|------------|----------------|---------|
| <b>A041909</b> | 60X120 REV | 8,20           | REVESTI |

### DIMENSIONS AND SURFACE PROPERTIES


|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                    |
| Flexion resistance        | EN ISO 10545-04 | => 15 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | 0.00                    |
| Cracking resistance       | EN ISO 10545-11 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GB  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB  |
| Stains resistance                                      | EN ISO 10545-14 | 3   |

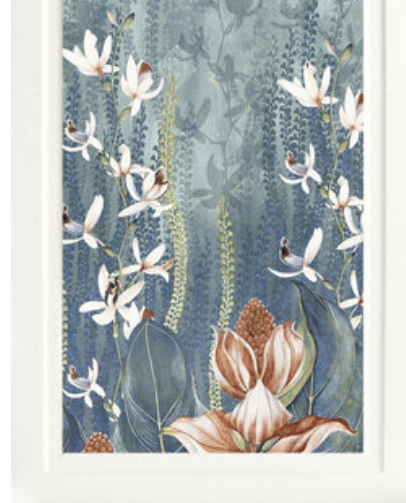

## COMO BLU MIX RECT 60X120

| REFERENCE      | SIZE (cm)  | THICKNESS (mm) | GROUP   |
|----------------|------------|----------------|---------|
| <b>A042331</b> | 60X120 REV | 8,20           | REVESTI |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                    |
| Flexion resistance        | EN ISO 10545-04 | => 15 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | 0.00                    |
| Cracking resistance       | EN ISO 10545-11 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GB  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB  |
| Stains resistance                                      | EN ISO 10545-14 | 3   |

## VARENNA AVORIO RECT 60X120

| REFERENCE      | SIZE (cm)  | THICKNESS (mm) | GROUP   |
|----------------|------------|----------------|---------|
| <b>A041906</b> | 60X120 REV | 7,20           | REVESTI |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                    |
| Flexion resistance        | EN ISO 10545-04 | => 15 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | 0.00                    |
| Cracking resistance       | EN ISO 10545-11 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GB  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB  |
| Stains resistance                                      | EN ISO 10545-14 | 3   |

## LECENO AVORIO RECT 60X120

| REFERENCE      | SIZE (cm)  | THICKNESS (mm) | GROUP   |
|----------------|------------|----------------|---------|
| <b>A041908</b> | 60X120 REV | 7,10           | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                    |
| Flexion resistance        | EN ISO 10545-04 | => 15 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | 0.00                    |
| Cracking resistance       | EN ISO 10545-11 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GB  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB  |
| Stains resistance                                      | EN ISO 10545-14 | 3   |

## DOMASO AVORIO RECT 60X120

| REFERENCE      | SIZE (cm)  | THICKNESS (mm) | GROUP   |
|----------------|------------|----------------|---------|
| <b>A041904</b> | 60X120 REV | 7,30           | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                    |
| Flexion resistance        | EN ISO 10545-04 | => 15 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | 0.00                    |
| Cracking resistance       | EN ISO 10545-11 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GB  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB  |
| Stains resistance                                      | EN ISO 10545-14 | 3   |

## VARENNA GRIGIO RECT 60X120

| REFERENCE      | SIZE (cm)  | THICKNESS (mm) | GROUP   |
|----------------|------------|----------------|---------|
| <b>A041996</b> | 60X120 REV | 7,20           | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                    |
| Flexion resistance        | EN ISO 10545-04 | => 15 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | 0.00                    |
| Cracking resistance       | EN ISO 10545-11 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GB  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB  |
| Stains resistance                                      | EN ISO 10545-14 | 3   |

## LECENO GRIGIO RECT 60X120

| REFERENCE      | SIZE (cm)  | THICKNESS (mm) | GROUP   |
|----------------|------------|----------------|---------|
| <b>A041997</b> | 60X120 REV | 7,10           | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                    |
| Flexion resistance        | EN ISO 10545-04 | => 15 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | 0.00                    |
| Cracking resistance       | EN ISO 10545-11 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GB  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB  |
| Stains resistance                                      | EN ISO 10545-14 | 3   |

## DOMASO GRIGIO RECT 60X120

| REFERENCE      | SIZE (cm)  | THICKNESS (mm) | GROUP   |
|----------------|------------|----------------|---------|
| <b>A041995</b> | 60X120 REV | 7,10           | REVESTI |

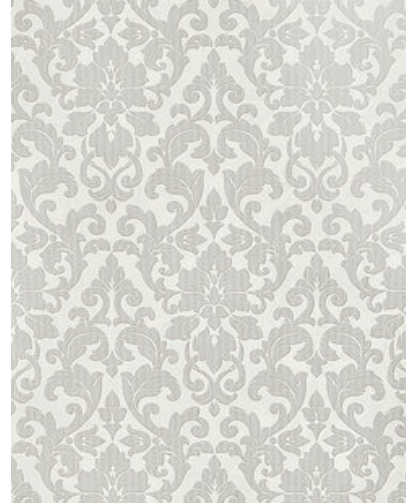

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                    |
| Flexion resistance        | EN ISO 10545-04 | => 15 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | 0.00                    |
| Cracking resistance       | EN ISO 10545-11 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GB  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB  |
| Stains resistance                                      | EN ISO 10545-14 | 3   |

## MAJESTIC MANDORLA RECT 60X120

| REFERENCE      | SIZE (cm)  | THICKNESS (mm) | GROUP   |
|----------------|------------|----------------|---------|
| <b>A042716</b> | 60X120 REV | 7,00           | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |      |
|------------------|-----------------|------|
| Frost resistance | EN ISO 10545-12 | 0.00 |
|------------------|-----------------|------|

### CHEMICAL PROPERTIES